

LOWILITE[®] 28 UV absorber

Ultraviolet Light Absorber

Description

LOWILITE[®] 28 UV absorber is an ultraviolet light absorber belonging to the benzotriazole class of UVAs

Chemical Name

2-(2'-Hydroxy-3',5'-di-*t*-amylphenyl)benzotriazole

CAS Reg. Number


25973-55-1

EINECS Number

247-384-8

Formula

LOWILITE[®] 28 UV absorber

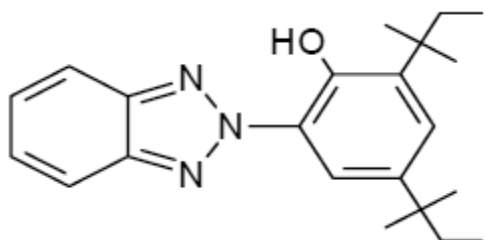

Typical physical properties of LOWILITE[®] 28 UV absorber

Appearance	Off-white powder
Bulk density (kg/m ³)	260
Molecular weight [g/mol]	351
Specific Gravity @ 25°C	1.17
Melting range, °C	80
Flash point, °C	230

The information contained herein relates to a specific AddivantTM product and its use. It is based on information available as of the date hereof. Additional information relating to the product can be obtained from the applicable Material Safety Data Sheets. Nothing in this Technical Data Sheet shall be construed to modify any AddivantTM standard terms and conditions of sale, under which the product is sold by AddivantTM. NOTHING IN THIS TECHNICAL DATA SHEET SHALL BE CONSTRUED TO CONSTITUTE A REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, REGARDING THE PRODUCT'S CHARACTERISTICS, USE, QUALITY, SAFETY, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ANY AND ALL SUCH REPRESENTATIONS AND WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. Nothing contained herein shall constitute permission or recommendation to practice any intellectual property without the permission of the owner.

Thermogravimetric Analysis (10 mg @ 10°C/minute under N₂)

Weight Loss [%]	5	10	25
Temperature [°C]	197	210	247

Solubility (g/100g solvent) @ 25°C

Xylene	44	Mineral Spirits	14
<i>n</i> -Hexane	30	Acetone	13
Chloroform	90	Styrene	70
Methanol	0.5	Toluene	78
<i>n</i> -Butyl acetate	28	Methyl Ethyl Ketone	24
Water	<0.1	Ethyl Acetate	28

Applications

LOWILITE® 28 UV absorber is a strong ultraviolet light absorber in the 290-400nm region. It provides effective light stabilization and prevents the yellowing and degradation of polymers such as polyolefins, PVC, unsaturated polyester, acrylics, ABS, thermoplastic urethanes, moisture cured polyurethanes, two component epoxies and urethanes, oil alkyds and thermosetting acrylic enamels.

Handling and Storage

The use of proper protective equipment is recommended. Excess exposure to the product should be avoided. Wash thoroughly after handling. Store the product in a cool, dry, well-ventilated area away from incompatible materials. Unless otherwise stated, the shelf life of the product is 3 years when it is properly stored.

For additional handling and toxicological information consult the Addivant™ Material Safety Data Sheet.

The information contained herein relates to a specific Addivant™ product and its use. It is based on information available as of the date hereof. Additional information relating to the product can be obtained from the applicable Material Safety Data Sheets. Nothing in this Technical Data Sheet shall be construed to modify any Addivant™ standard terms and conditions of sale, under which the product is sold by Addivant™. NOTHING IN THIS TECHNICAL DATA SHEET SHALL BE CONSTRUED TO CONSTITUTE A REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, REGARDING THE PRODUCT'S CHARACTERISTICS, USE, QUALITY, SAFETY, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ANY AND ALL SUCH REPRESENTATIONS AND WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. Nothing contained herein shall constitute permission or recommendation to practice any intellectual property without the permission of the owner.