

ENCOR® FLEX 192

MODIFIED ACRYLIC LATEX FOR GENERAL PURPOSE
ELASTOMERIC COATINGS AND SPECIALTY ROOF COATINGS



Product Description

ENCOR® Flex 192 is a high solids, ambient-crosslinking, modified acrylic latex designated for use in elastomeric roof and wall coatings. General purpose elastomeric coatings based on ENCOR® Flex 192 latex exhibit excellent dirt up resistance. This latex can also be formulated into self-priming elastomeric coatings for use in restoration of aged TPO roof membranes without the need for solvent-based primers.

Properly formulated ENCOR® Flex 192 also meets the requirements of ASTM D-6083 ("Standard Specification for Liquid Applied Acrylic Coating used in Roofing") and the "Cool Roof Rating Council's (CRRC)" product rating program for reflectance and emittance at VOC levels less than 50 grams per liter.

Polymer Design

- Modified Acrylic Latex
- High solids for greater formulating latitude
- Low VOC Capable (<50 g/L)

Performance Benefits

- Excellent adhesion to all membrane types, including aged TPO
- Suitable for self-priming elastomeric coatings thereby eliminating the need for solvent-based primer resulting in reduced overall system VOC and cost
- Ambient crosslinking functionality for increased toughness and superior dirt pick-up resistance
- Outstanding elastomeric properties (elongation, tensile, tear)
- Meets ASTM D-6083 performance standards for elastomeric coatings

Typical Properties¹

Total Solids, % by weight	60
Latex Weight per Gallon, lb	8.7
pH Value	8
Particle Size, μm	0.35
Viscosity, Brookfield, cP	500
Glass Transition Temp. (Tg), midpoint °C	-21


¹ Typical values not to be construed as sales specifications.



ENCOR® FLEX 192


MODIFIED ACRYLIC LATEX FOR GENERAL PURPOSE ELASTOMERIC COATINGS AND SPECIALTY ROOF COATINGS

Adhesion Performance

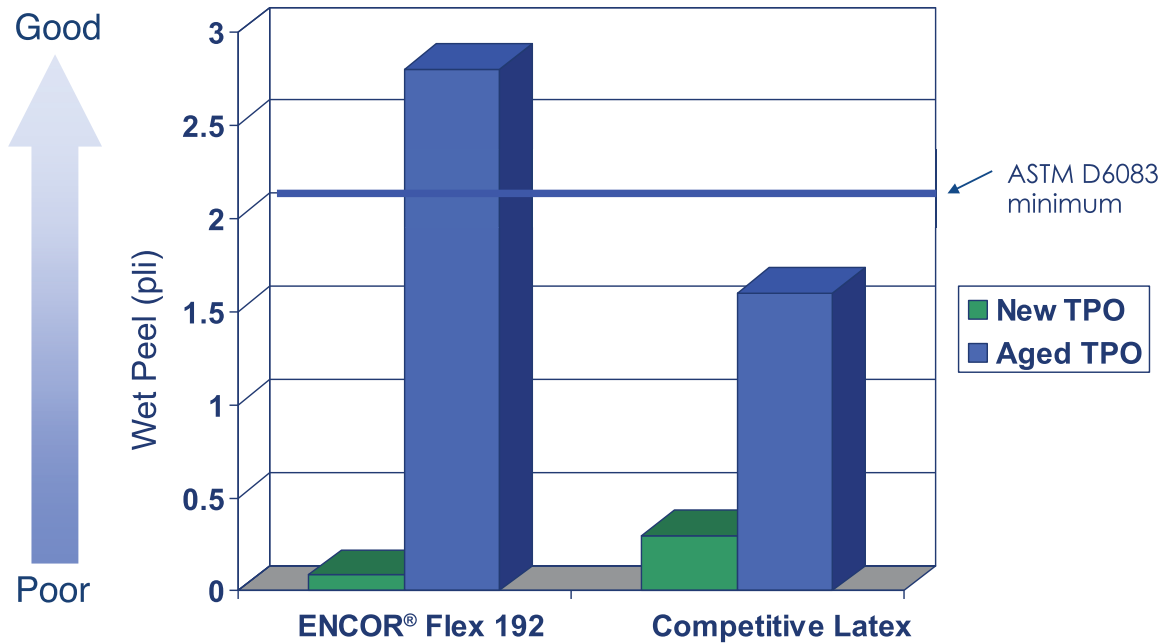

Passes ASTM D6083 wet peel adhesion requirement, even over difficult to adhere to membranes such as aged TPO, without requiring a solvent-based primer.


Elastomeric Properties

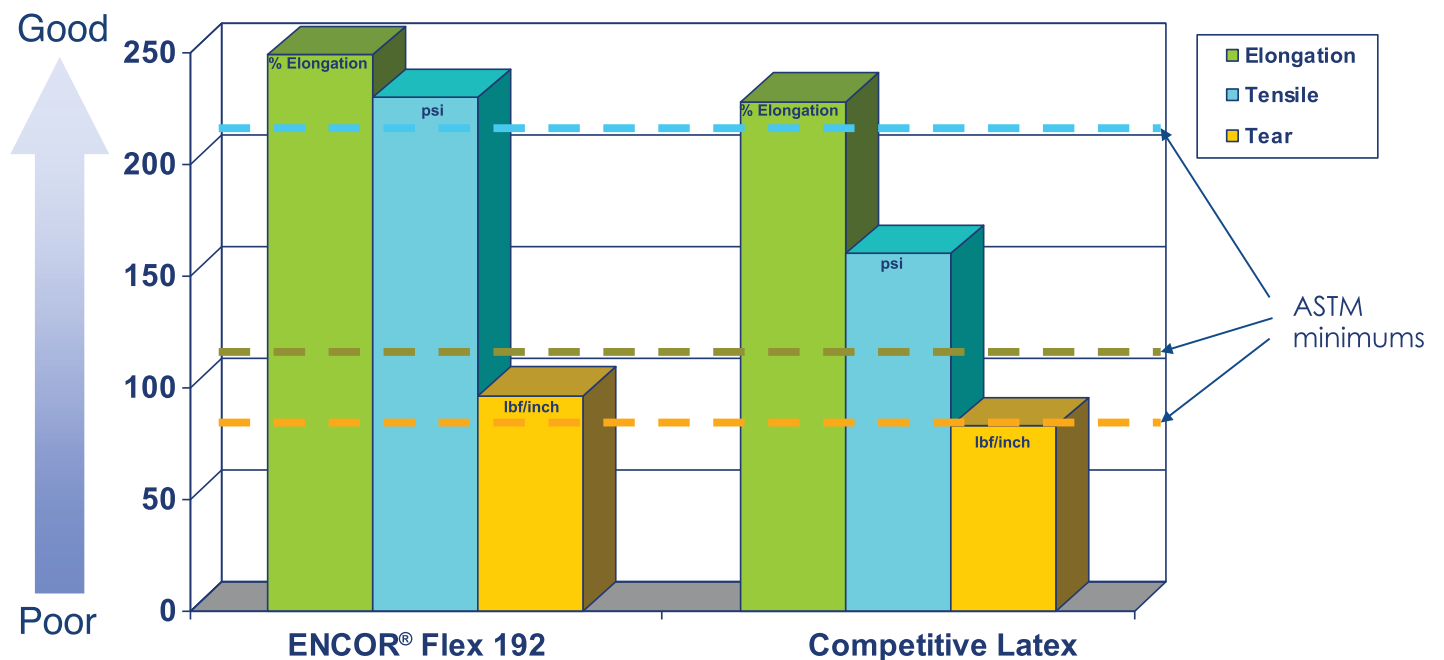

ENCOR® FLEX 192

MODIFIED ACRYLIC LATEX FOR GENERAL PURPOSE ELASTOMERIC COATINGS AND SPECIALTY ROOF COATINGS

Accelerated Dirt Pick-Up Resistance *

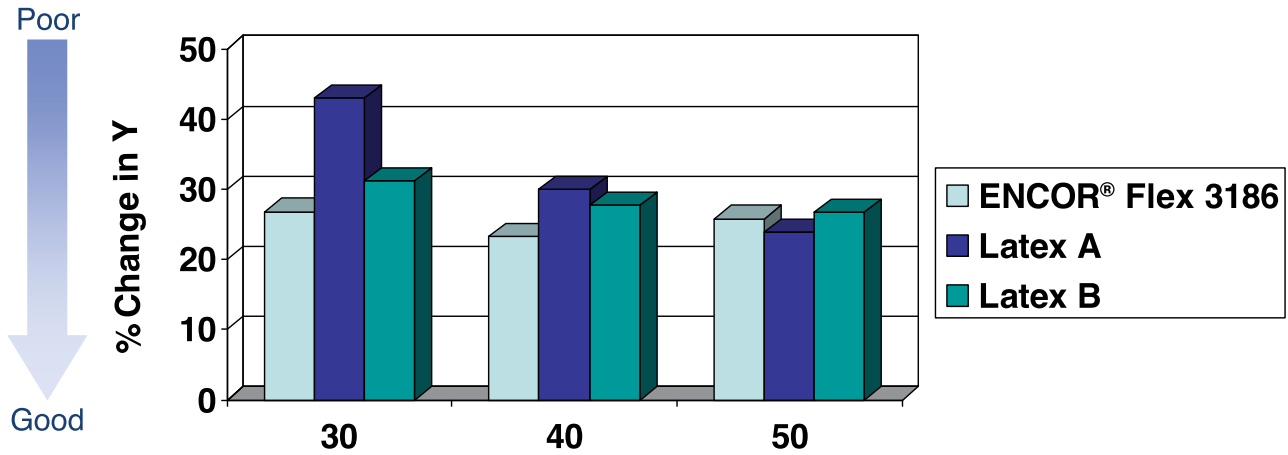

* Coatings tested after 100 hours QUV

Dirt added as a slurry and allowed to dry overnight.

Exterior Durability

Sprayed Polyurethane Foam Substrate.



Thermoplastic Polyolefin Substrate.



The superior dirt pick up resistance of ENCOR® Flex 192 is highlighted in sections C and E after 3 years exposure in Cary, NC.

ENCOR® FLEX 192

MODIFIED ACRYLIC LATEX FOR GENERAL PURPOSE ELASTOMERIC COATINGS AND SPECIALTY ROOF COATINGS

Starting Point Formulation

ENCOR® Flex 192 Formulation

Ingredients		Lbs	Gallons
<i>Grind</i>			
Water		134.4	16.13
Propylene Glycol	Solvent	10.0	1.16
Ecodis™ P 30	Dispersant	4.3	.43
Natrosol™ 250 MBR	HEC Thickener	1.5	.15
Ammonium Hydroxide (28%)	Base	1.5	.2
FoamStar® A10	Defoamer	2.0	.27
Ti-Pure® R-960	TiO ₂	75.0	2.25
Omyacarb® 10	CaCO ₂	380.0	16.84
Acticide® BW20	Preservative	2.0	.21
Mildewcide	Biocide	15.0	1.45
		625.7	39.09
<i>Letdown</i>			
ENCOR® Flex 192	Binder - Latex	490.1	56.07
FoamStar™ A10	Defoamer	2.0	.21
Texanol® NXZ	Solvent	6.0	.76
Ammonium Hydroxide, 28%	Base	1.5	.2
Water		36	4.36
Natrosol® 250 MBR	HEC Thickener	2.5	.25
Totals		1163.8	100.00

Paint Properties:

Weight Solids, %	65.5
Volume Solids, %	50.1
PVC, %	38.2
VOC, lb/gal	0.31
VOC, g/L	36.9
Density, lb/gal	11.70
Total Pigment, %	38.96
Non-volatile Binder, %	25.18
Coalescent Level, %	2.04
Dispersant Level, %	0.38

Formulating Guidelines

- Avoid associative thickeners due to water sensitivity
- Extenders should be limited to low oil absorption and particle sizes above 10µm
- Zinc oxide should be avoided due to interference with bonding chemistry when used on TPO
- Keep pigment volume concentration less than 45%; higher PVCs can lower adhesion results
- Apply to properly cleaned TPO membranes with at least two years of UV exposure and without excessive deterioration or scrim exposed
- Field testing is recommended to assure adhesion

Ecodis™ is a trademark of Coatex SAS

Natrosol™ is a trademark of Ashland Global Holdings Inc.

FoamStar® is a registered trademark of the BASF Group

Ti-Pure® is a registered trademark of DuPont

Omyacarb® is a registered trademark of Omya AG

Acticide® is a registered trademark of Thor GmbH

Texanol® is a registered trademark of Eastman Chemical Company

ENCOR® FLEX 192

MODIFIED ACRYLIC LATEX FOR GENERAL PURPOSE ELASTOMERIC COATINGS AND SPECIALTY ROOF COATINGS

Product Safety

Before handling the materials listed in this bulletin, read and understand the product SDS (Safety Data Sheet) for additional information on personal protective equipment and for safety, health and environmental information. For environmental, safety and toxicological information, contact our Customer Service Department at 1-866-837-5532 to find a SDS, or visit our web site: www.arkemacoatingresins.com

No chemical should be used as or in a food, drug, medical device, or cosmetic, or in a product or process in which it may contact a food, drug, medical device, or cosmetic until the user has determined the suitability and legality of the use. Since government regulations and use conditions are subject to change, it is the user's responsibility to determine that this information is appropriate and suitable under current, applicable laws and regulations.

Arkema Coating Resins requests that the customer read, understand, and comply with the information contained in this publication and the current SDS(s). The customer should furnish the information in this publication to its employees, contractors, and customers, or any other users of the product(s), and request that they do the same.

Storage and Handling

Follow procedures typically recommended for polymer dispersions. Use corrosion-resistant storage tanks and piping. Air-operated diaphragm pumps are preferred.

Packaged material should be stored indoors in the original unopened and undamaged container, in a dry place. Exposure to direct sunlight should be avoided.

Avoid extreme temperatures. Do not freeze; store between 40-90°F (4-32°C).

For more details, refer to "*Storage and Handling of Arkema Coating Resins Products – A Basic Guide*".



Arkema Coating Resins
410 Gregson Dr.
Cary, NC 27511
Telephone:
1.800.777.8227

IMPORTANT: The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

DISCLAIMER: Please consult Arkema's disclaimer regarding the use of Arkema's products on <http://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Visit our website:
www.arkemacoatingresins.com

© 2018 Arkema Inc. All rights reserved. Revised 10/18
ENCOR® is a registered trademark of Arkema Inc.