



Southeastern Performance Minerals, LLC

OPTIsheen C Muscovite Mica

General Description


OPTIsheen C is a ground muscovite mica with a platy shape, high aspect ratio, chemical inertness, and superior color. These characteristics make OPTIsheen C an acceptable, cost effective additive for the following markets:

Joints Compounds
 Asphalt Products
 Asbestos Replacement
 Foundry Coatings
 Adhesives

Gaskets
 Wire & Cable
 Plastics
 Paints & Coatings

Typical Properties

Sieve Analysis	% retained
+60 mesh	trace
+100 mesh	<1.0%
+325 mesh	20-35%
Bulk Density (Colgate)	14-21
Mean Particle Size (µm)	40.0
Color, L* value	>90
Moisture Loss @ 100°C	<1.0%
Specific Gravity	2.82
pH	6.0-7.5
CAS No.	12001-26-2

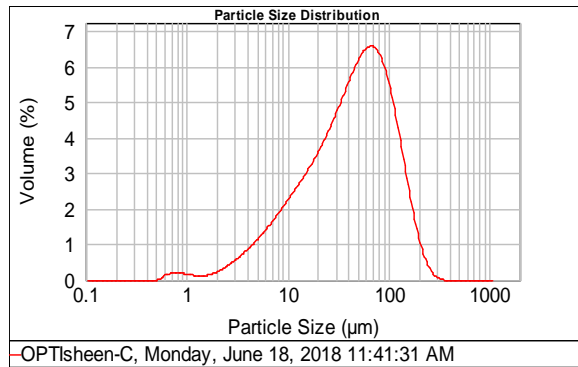

See SDS for safety and regulatory information.

Southeastern Performance Minerals, LLC
 1132 Veal Rd.
 Sandersville, GA 31082

Phone: (478)553-0048
 Fax: (478)553-0050
info@sepm.us

The statements herein are based on data which is believed to be reliable. This data is offered in good faith and typical of normal production. SEPM make no warranty or representation, expressed or implied, regarding the accuracy of this data or the use of this product. The user is solely responsible for the use of this product.

Issue date: 6/11/15

Revised date: 6/18/18