



# Southeastern Performance Minerals, LLC

## PMica 25 Muscovite Mica

### General Description


PMica 25 is a wet ground muscovite mica, processed specifically for industrial applications. Proprietary milling and processing induces a high degree of delamination and narrow particle size distribution, which translates to high aspect ratio and increased resiliency. These characteristics make PMica 25 an acceptable, cost effective additive for the following markets:

Paints & Coatings  
 Mold Releases  
 Foundry Coatings  
 Gaskets

Wire & Cable  
 Plastics  
 Plastics

### Typical Properties

Sieve Analysis	% retained
+100 mesh	trace
+325 mesh	<1.0%
Bulk Density (Colgate)	8-12
Mean Particle Size (µm)	20-25
Color, L* value	>90
Moisture Loss @ 100°C	<0.5%
Specific Gravity	2.82
pH	6.0-7.5
CAS No.	12001-26-2

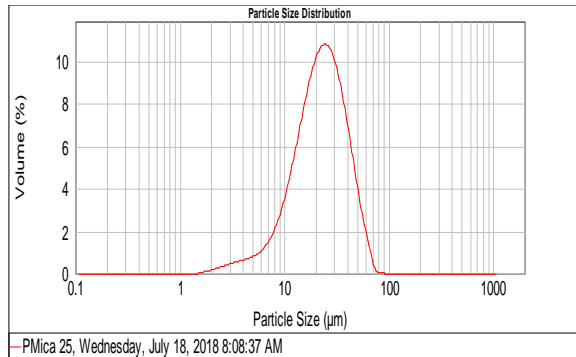

See SDS for safety and regulatory information.

Southeastern Performance Minerals, LLC  
 1132 Veal Rd.  
 Sandersville, GA 31082

Phone: (478)553-0048  
 Fax: (478)553-0050  
[info@sepm.us](mailto:info@sepm.us)

The statements herein are based on data which is believed to be reliable. This data is offered in good faith and typical of normal production. SEPM make no warranty or representation, expressed or implied, regarding the accuracy of this data or the use of this product. The user is solely responsible for the use of this product.

Issue date: 7/02/18

Revised date: 7/18/18