



# Southeastern Performance Minerals, LLC

## SMflake 200 Muscovite Mica


### General Description

SMflake 200 is a wet ground muscovite mica, processed specifically for industrial applications. Proprietary milling induces a high degree of delamination, which translates into a high aspect ratio and increased resiliency. These characteristics make SMflake 200 an acceptable, cost effective additive for the following markets:

- |                      |                  |
|----------------------|------------------|
| Stucco               | Foundry Coatings |
| Asphalt Coatings     | Plastics         |
| Asbestos Replacement | Rubber           |
| Mold Releases        | Cultured Stone   |

### Typical Properties

Sieve Analysis	% retained
+30 mesh	<2.0%
+200 mesh	>75%
Bulk Density (Colgate)	<35
Mean Particle Size (µm)	160-180
Color, L* value	>90
Moisture Loss @ 100°C	<0.5%
Specific Gravity	2.82
pH	6.0-7.5
CAS No.	12001-26-2

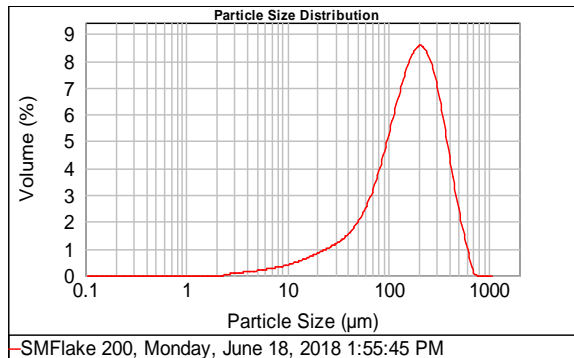

See SDS for safety and regulatory information.

Southeastern Performance Minerals, LLC  
 1132 Veal Rd.  
 Sandersville, GA 31082

Phone: (478)553-0048  
 Fax: (478)553-0050  
 info@sepm.us

The statements herein are based on data which is believed to be reliable. This data is offered in good faith and typical of normal production. SEPM make no warranty or representation, expressed or implied, regarding the accuracy of this data or the use of this product. The user is solely responsible for the use of this product.

Issue date: 6/11/15

Revised date: 6/18/18