



SABIC® POM
SABITAL™

POLYOXYMETHYLENE (POM) is a semi-crystalline thermoplastic material commonly referred to as **acetal** or **polyacetal**. SABIC® POM is suitable for highly engineered applications that require precision and durability, may be used to replace metal in many applications.

KEY PRODUCT PROPERTIES



HIGH STRENGTH AND STIFFNESS
High mechanical strength and rigidity



EASE OF MACHINING
Wide useful temperature range



EXCELLENT WEAR PROPERTIES
High resistance to repeated impacts



SELF-LUBRICATION
Low friction coefficient



SUPERIOR CHEMICAL RESISTANCE
EXCELLENT RESISTANCE TO moisture, fuel, solvents and many other chemicals



GOOD DIMENSIONAL STABILITY
Outstanding long-term fatigue endurance

SABITAL™ is a glass-fiber reinforced POM at different concentrations to enhance the mechanical and thermal properties of the product.

Next to the properties of the unfilled POM, glass-fiber reinforced POM may offer:



SUPERIOR RIGIDITY, HARDNESS & TENSILE STRENGTH
(compared to unmodified copolymer)



IMPROVED MOLD SHRINKAGE



EXCELLENT CREEP RESISTANCE



LOWER COEFFICIENT OF EXPANSION



EXCELLENT SOLVENT RESISTANCE



KEY APPLICATIONS

AUTOMOTIVE

- Seat belt buckle
- Door handle
- Speaker grill
- Fuel cap
- Fuel pump

PLUMBING & IRRIGATION

- Pipe fitting
- Water sprinkler
- Shower head

ELECTRONIC APPLIANCES

- Washing machines
- Gears
- Printers
- Keyboard push buttons

CONSUMER ARTICLES

- Zippers
- Sporting goods
- Toys




SABIC® POM PORTFOLIO

	SABIC Grade	Melt Index (g/10 min)*	Density (g/cm ³)	Characteristics
SABIC® POM	POM 30RE	2.8	1.41	Stiff-flowing, voids free copolymer grade, suitable for extrusion. Good chemical resistance to solvents, fuel and strong alkalis in addition to its good hydrolysis resistance.
	POM 30S	3	1.41	Stiff flowing copolymer grade, suitable for injection molding and extrusion. High impact toughness. Good tracking resistance over range of temperature.
	POM 90S	9	1.41	General purpose standard injection molding grade. High rigidity, toughness and hardness.
	POM 140S	14	1.41	Easy flowing injection molding grade for precision molded parts and thin-walled molded parts with high rigidity, high toughness and hardness.
	POM 280S	27	1.41	Very easy flowing injection molding grade. High rigidity and hardness.
	POM 460S	45	1.41	Extremely Easy flowing injection molding grade for thin-walled precision molded parts with complicated flowpath-wall thickness relation. Permits processing at reduced temperature and shorter cycle times.
SABITAL™	90GV10	8.4	1.48	Glass fiber compounded grade for injection moulding applications. Good flow and combination of strength and stiffness. Good dimensional stability.
	90GV20	7	1.57	Glass fiber compounded grade for injection moulding applications. Moderate flow with higher strength, stiffness, hardness, and high HDT. Good dimensional stability
	90GV30	6.4	1.60	Glass fiber compounded grade for injection moulding applications. Combination of very high strength, very high stiffness, hardness, and high HDT. Good dimensional stability.

*Please refer to safety data sheet (SDS) separately for information on EHS general guidelines and precautions during handling and storage of SABIC® POM on www.sabic.com

Please refer to safety data sheet & FDA certificate in website.

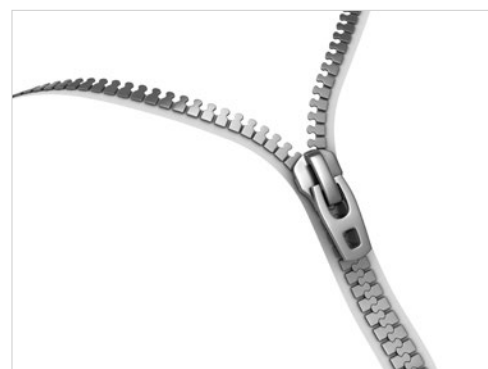

CONTACT US

Middle East and Africa

Global Headquarters

PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (011) 225 8000
F +966 (011) 225 9000
E info@sabic.com

Americas

2500 City West Boulevard
Suite 650, Houston
TX 77042
USA
T +1 713 532 4999
F +1 713 532 4994
E info@americas.sabic.com

Europe

PO Box 5151
6130 PD Sittard
The Netherlands
T +31 467 222 222
F +31 467 220 000
E info@sabic.com

Asia Pacific

One Temasek Avenue
06-01 Millenia Tower
Singapore 039192
T +65 655 725 55
F +65 653 181 01
E info@sabic.com.sg

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right. SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

† Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

© 2019 Copyright by SABIC. All rights reserved.